


Downlight fitting

5905339255624

Tod T









Kanlux LITEN downlights with integrated LED light source are designed for mounting in suspended ceilings. All Kanlux LITEN ceiling luminaires have a built-in power supply enabling connection of the luminaires to an 230V AC grid.

GENERAL DATA:

Colour: white Place of assembly: Recessed mount in the ceiling Place of application: Indoors Minimum distance from the illuminated object: 0,5m Compatible with a dimmer: no Replaceable light source: no The product is not suitable to be covered with a heatinsulating material: yes Height [mm]: 39 Diameter [mm]: 116 Assembly hole [mm]: Ø96 Integrated LED light source: yes


TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50/60 Maximum power [W]: 8 Class of protection against electric shock: II Lampshade material: plastic Diode type: LED SMD Luminous flux [lm]: 550 Colour temperature: Warm white Colour temperature [K]: 3000 **Colour uniformity [SDCM]**: ≤ 6 Colour-rendering index Ra: ≥80 Service life [h]: 20000 Number of on/off cycles: ≥25000 Lighting angle [°]: 110 Luminous efficiency of the lamp [lm/W]: 69 Ambient temperature range to which the product can be exposed: 5÷25 Enclosure material: plastic **Connection type**: Bolt terminal block The fixture set includes built-in LED's with the following energy classes: A++,A+,A Lamp-heating time [s]: ≤ 1 Lamp-ignition time [s]: ≤0,5 IP class: 40/20






Downlight fitting





LOGISTIC DATA:

Unit of measurement: unit Packaging method: 50 Number of units in the secondary packaging: 1 Number of units in the packaging: 50 Net unit weight [g]: 120 Grammage [g]: 171.6 Length of a unit pack [cm]: 12 Width of a unit pack [cm]: 12 Width of a unit pack [cm]: 15 Height of a unit pack [cm]: 25 Height of a cardboard box [kg]: 8.58 Width of a cardboard box [kg]: 8.58 Width of a cardboard box [cm]: 26 Length of a cardboard box [cm]: 26 Length of a cardboard box [cm]: 61.5 Volume of a cardboard box [m³]: 0.042374

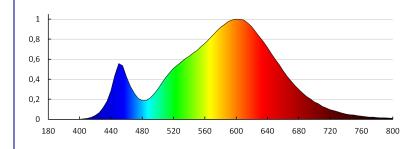

KANLUX S.A. (kat 25562) LITEN LED 8W-WW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 25562) LITEN LED 8W-WW Lampy: 1 x LITEN LED 8W-WW

