

















Kanlux


Basic data


- rated voltage [V]: 220-240 AC
- power: 18W
- luminous flux: from 1350lm to 1550lm
- colour temperature: 3000K, 4000K
- models with motion sensor (with the possibility of switch-DIP)
- UV resistance IP54

Kanlux BENO 18W NW-O-W; SE W Kanlux BENO 18W NW-O-GR; SE GR



Kanlux BENO 18W NW-L-W; SE-W Kanlux BENO 18W NW-L-GR; SE-GR

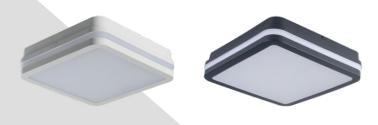











Available 18W models:

	Index	colour	PIR	power	Lumen output	CCT [K]
BENO 18W WW-L-GR	33380	graphite	N	18W	1350lm	3000K -
BENO 18W WW-L-W	33381	white	N	18W	1480lm	3000K
BENO 18W WW-O-GR	33382	graphite	N	18W	1350lm	3000K
BENO 18W WW-O-W	33383	white	N	18W	1480lm	3000K -
BENO 18W NW-O-W	32940	white	N	18W	1550lm	4000K
BENO 18W NW-O-GR	32941	graphite	N	18W	1550lm	4000K
BENO 18W NW-L-W	32942	white	N	18W	1550lm	4000K
BENO 18W NW-L-GR	32943	graphite	N	18W	1550lm	4000K
BENO 18W NW-O-SE W	32944	white	Y	18W	1550lm	4000K
BENO 18W NW-O-SE GR	32945	graphite	Y	18W	1550lm	4000K
BENO 18W NW-L-SE W	32946	white	Υ	18W	1550lm	4000K
BENO 18W NW-L-SE GR	32947	graphite	Υ	18W	1550lm	4000K

Surface mount fittings:

Housing material: plastic

Diffuser: plastic



Kanlux

Basic data

- rated voltage [V]: 220-240 AC
- power: **24W**
- luminous flux: from 1880lm to 2060lm
- colour temperature: 3000K, 4000K
- models with motion sensor (with the possibility of switch-DIP)
- UV resistance IP54

Kanlux BENO 24W NW-O-W; SE W Kanlux BENO 24W NW-O-GR; SE GR



Kanlux BENO 24W NW-L-W; SE-W Kanlux BENO 24W NW-L-GR; SE-GR











Available 24W models:

	Index	colour	PIR	power	Lumen output	CCT [K]
BENO 24W WW-L-GR	33384	graphite	N	24W	1880lm	3000K -
BENO 24W WW-L-W	33385	white	N	24W	2040lm	3000K
BENO 24W WW-O-GR	33386	graphite	N	24W	1880lm	3000K
BENO 24W WW-O-W	33387	white	N	24W	2040lm	3000K -
BENO 24W NW-O-W	33340	white	N	24W	2060lm	4000K
BENO 24W NW-O-GR	33341	graphite	N	24W	1920lm	4000K
BENO 24W NW-L-W	33342	white	N	24W	2060lm	4000K
BENO 24W NW-L-GR	33343	graphite	N	24W	1920lm	4000K
BENO 24W NW-O-SE W	33344	white	Υ	24W	2060lm	4000K
BENO 24W NW-O-SE GR	33345	graphite	Y	24W	1920lm	4000K
BENO 24W NW-L-SE W	33346	white	Υ	24W	2060lm	4000K
BENO 24W NW-L-SE GR	33347	graphite	Υ	24W	1920lm	4000K

Surface mount fittings:

Housing material: plastic

Diffuser: plastic



Kanlux

Kanlux BENO 18W and 24W



kanlux.com