

Bezpieczeństwo
Produkcja
kontrolowana



TÜVRheinland
CERTYFIKOWANO

www.tuv.com
ID 000083214

iQ-LED
Kanlux



A NEW PREMIUM
FLOODLIGHT LINE IN THE
KANLUX IQ-LED FAMILY

Kanlux iQ-LED FL

up to
120 $\frac{\text{lm}}{\text{W}}$
EFFICACY



5
WARRANTY
5 years

iQ-LED

Kanlux

iQ-LED Kanlux

**CHOOSE DURABILITY, QUALITY
AND ENERGY SAVINGS**

iQ-LED FL floodlights are part of Kanlux's iQ-LED line, which means that they combine the primary benefit of LED lighting technology – low energy use – and the highest quality components.

Introducing Premium iQ-LED Family products by Kanlux.

<https://www.kanlux.com/pl/iq>




iQ-LED

Kanlux



Safety
Regular
Production
Surveillance



www.tuv.com
ID 0000083214



WARRANTY
5 years*

up to
120 $\frac{\text{lm}}{\text{W}}$
EFFICACY



BRANDED
components

IP
65/44

auto
matic
produc
tion


Kanlux iQ-LED FL

GUARANTEED DURABILITY AND ENERGY SAVINGS

Thanks to the use of high-quality components and automated production processes, the entire iQ-LED FL line is covered by a 5-year warranty (50,000h durability). IP 65 (IP 44 for the motion sensor version) protection ensures high resistance to ambient weather while the excellent lighting efficiency exceeding 120lm/W brings you increased energy savings. Featuring branded, high-quality LEDs, Kanlux's iQ-LED line guarantees top-of-the-line lighting parameters.



iQ LED
Kanlux

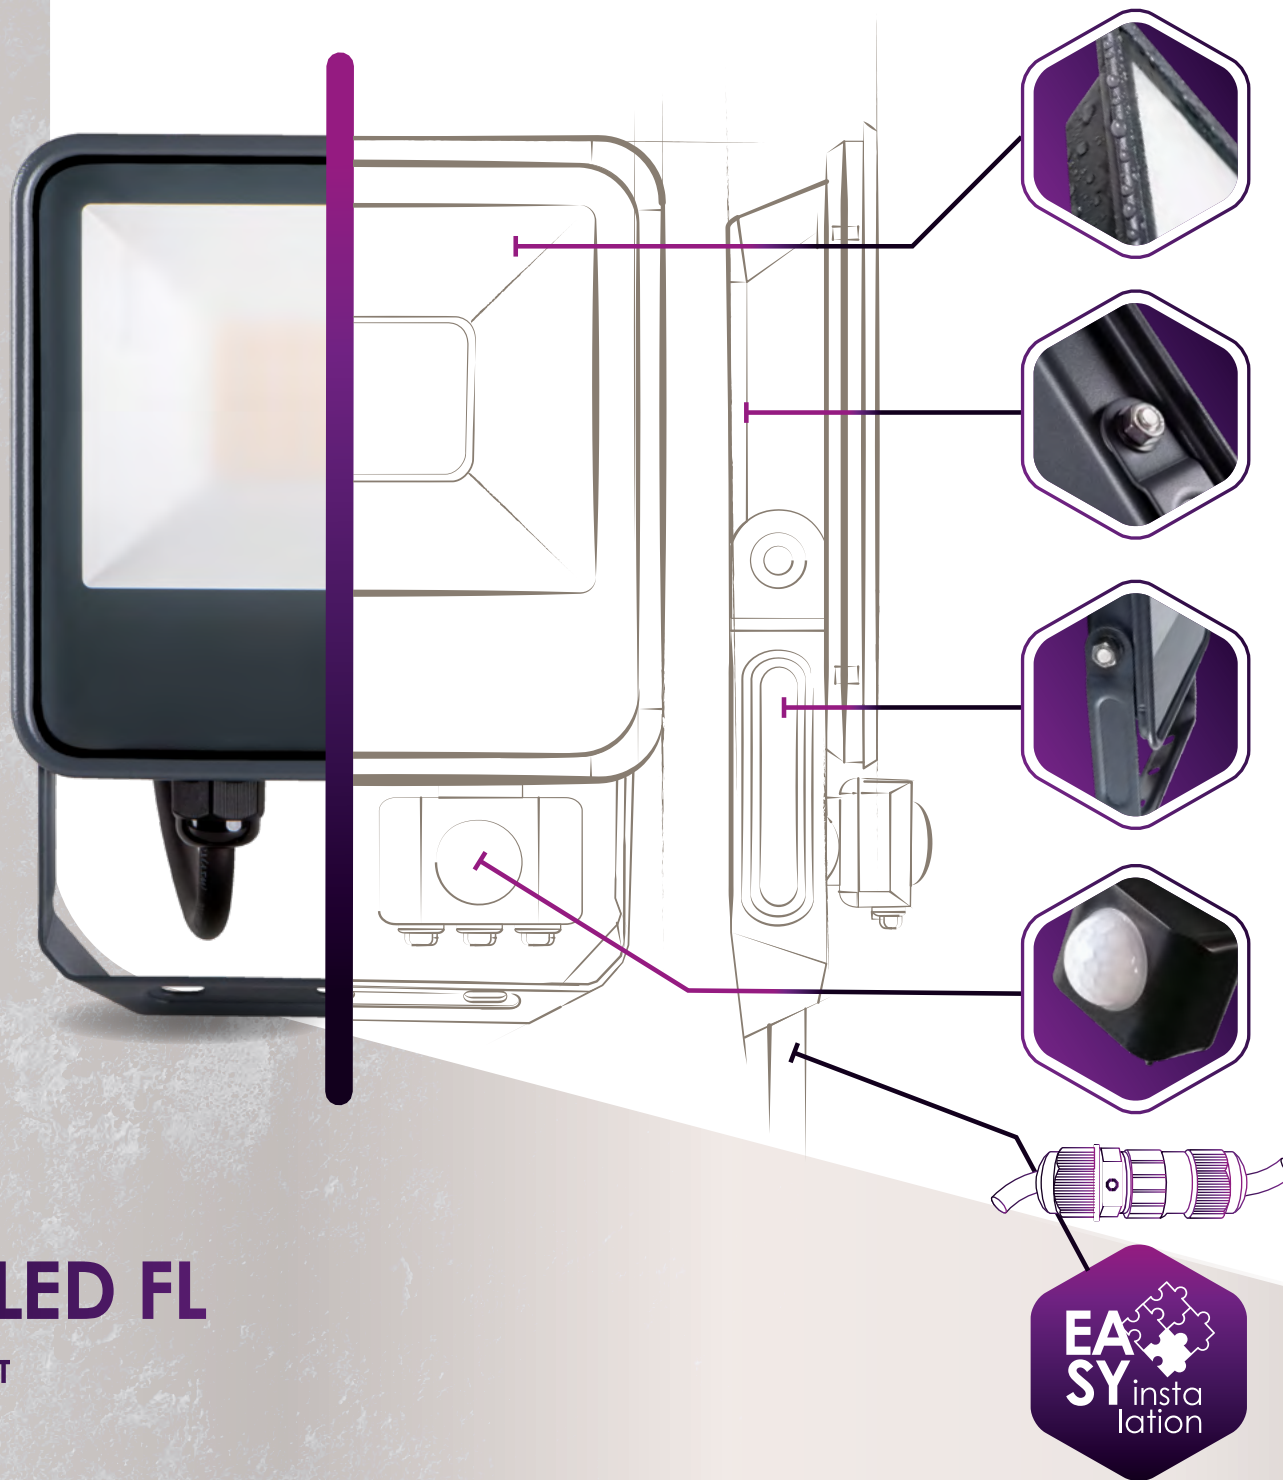

IP 65 (IP 44 for the motion sensor version) protection provides high resistance to ambient weather

The extruded aluminum housing sets new design trends and in conjunction with the automation of the production process, ensures optimal conditions of use

An ergonomic handle enables quick and easy installation with no need to remove it beforehand

Motion sensor and non-motion sensor versions available

A hermetically sealed quick-connect coupling allows you to quickly and effortlessly connect the floodlight to the electric wire

Kanlux iQ-LED FL

TOP QUALITY FOR THE MOST DEMANDING CUSTOMERS.

EASY installation

iQ^{LED}

Kanlux



Kanlux iQ-LED

An ideal lighting solution for driveways, garages, green areas, as well as residential, commercial and industrial buildings.

Kanlux iQ-LED FL

Two enclosure variants

iQ^{LED}

Kanlux

Kanlux iQ-LED FL... -SE



IP
44

with a motion sensor

— 10W — 20W — 30W — 50W —

Kanlux iQ-LED FL



IP
65

without a motion sensor

— 10W — 20W — 30W — 50W — 90W —

iQ^{LED}

Kanlux



Kanlux iQ-LED FL



Model	Power [W]	Light Output [lm]	Efficiency [lm/W]	Sensor
33880	10W	1200lm	120lm/W	NONE
33881	20W	2300lm	115lm/W	NONE
33882	30W	3450lm	115lm/W	NONE
33883	50W	6000lm	120lm/W	NONE
33884	90W	10800lm	120lm/W	NONE
33885	10W	1200lm	120lm/W	PIR
33886	20W	2300lm	115lm/W	PIR
33887	30W	3450lm	115lm/W	PIR
33888	50W	6000lm	120lm/W	PIR

Colour temperature: 4000K
 Rated voltage[V]: 220-240 AC
 IEC protection class: I
 Durability: 50 000 h
 Number of on/off cycles: ≥ 25,000

Housing material: steel
 Protective glass material: tempered glass
 Housing colour: dark grey
 Wire length: 30 cm


EXTRA ACCESSORY: IQ-LED FL QC I 3x1MM2 /33889/
 Hermetically-sealed quick-connect coupling, enabling quick
 and easy connection of the wire and the floodlight.




Safety
 Regular
 Production
 Surveillance



www.tuv.com
 ID 0000083214



IQ-LED FL-10W-NW:
109x92x27mm
IQ-LED FL-20W-NW:
164x135x30mm
IQ-LED FL-30W-NW:
186x135x30mm
IQ-LED FL-50W-NW:
240x180x30mm
IQ-LED FL-90W-NW:
314x243x38



IQ-LED FL-10W-NW-SE:
164x135x56mm
IQ-LED FL-20W-NW-SE:
164x135x56mm
IQ-LED FL-30W-NW-SE:
186x135x56mm
IQ-LED FL-50W-NW-SE:
240x180x56mm



5
 WARRANTY
 5 years*



up to
120 lm/W
 EFFICACY



auto
 matic
 produc
 tion



IP
65/44



EA
 SY
 insta
 lation

* THE 5-YEAR WARRANTY IS SUBJECT TO TERMS AND CONDITIONS OF THE WARRANTY DECLARATION AVAILABLE ON OUR WEBSITE



Kanlux iQ-LED FL



securely packed

