

Kanlux



Kanlux ALER JQ

[V] 220-240 AC	[Hz] 50	IP 44			 3-2000	 -20÷40
	 1÷2,5	CE	EAC	UK CA		



ALER JQ-30-W



Model	Code	Dimensions	Mounting	Dimensions	Delay	Sensor	Range
ALER JQ-30-W	00460	1200	за настенен монтаж	H160/V20	8-7	PIR	max 12
ALER JQ-30-B	00461	1200	за настенен монтаж	H160/V20	8-7	PIR	max 12
ALER JQ-30-B/B	23458	1200	за настенен монтаж	H160/V20	8-8	PIR	max 10




ALER JQ-30-W




ALER JQ-30-B



ALER JQ-30-B/B

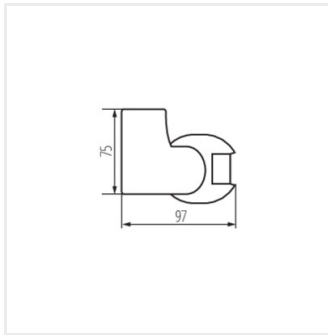

ALER JQ-30

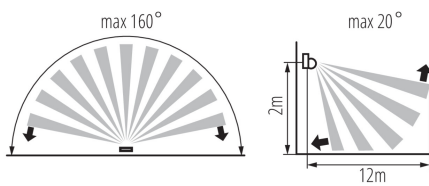

Date of issue: 04.02.2025, 13:55

Запазва се правото за въвеждане на технически промени. Данните, съдържащи се в този материал, не са правно обвързващи.

Фотометрия: резултати, получени по време на изпитване на дадения екземпляр.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com