


## 23187 KRD6-2/25/100

Residual-current circuit breaker, 2P

5905339231871

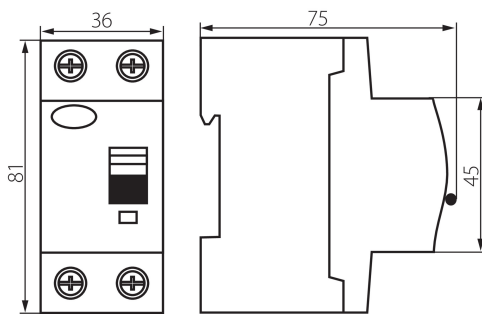

Residual current circuit breaker: is used for additional protection against electric shock, designed for work in sinusoidal alternating current circuits (AC type) and sinusoidal alternating and pulsating current with DC component (A type).

### GENERAL DATA:

**Colour:** white  
**Place of assembly:** na szynę TH35  
**Norm:** PN-EN 61008-1  
**Length [mm]:** 75  
**Width [mm]:** 35  
**Height [mm]:** 81

### TECHNICAL DATA:

**Rated voltage [V]:** 230 AC  
**Rated current [A]:** 25  
**Rated frequency [Hz]:** 50  
**Ambient temperature range to which the product can be exposed:** -25÷40  
**Range of sections of wires used [mm<sup>2</sup>]:** do 35  
**Residual-current protection type:** AC  
**Number of modules:** 2  
**Differential-rated current [mA]:** 100  
**IP class:** 20  
**Rated insulation voltage UI [V]:** 400  
**Number of poles:** 2

### LOGISTIC DATA:

**Unit of measurement:** unit  
**Packaging method:** 60  
**Number of units in the secondary packaging:** 1  
**Number of units in the packaging:** 60  
**Net unit weight [g]:** 210  
**Grammage [g]:** 242.33  
**Length of a unit pack [cm]:** 9  
**Width of a unit pack [cm]:** 4.5  
**Height of a unit pack [cm]:** 8.5  
**Weight of a cardboard box [kg]:** 14.5398  
**Width of a cardboard box [cm]:** 28  
**Height of a cardboard box [cm]:** 18.5

## 23187 KRD6-2/25/100

---

Residual-current circuit breaker, 2P

**Length of a cardboard box [cm] : 47**

**Volume of a cardboard box [m<sup>3</sup>] : 0.024346**