


23256 KCS-40A/2P

Przełącznik instalacyjny

5905339232564

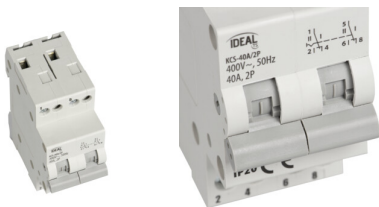

GENERAL DATA:

Utilisation category: AC-22A

Place of application: Indoors

Norm: PN-EN 60947-3

Length [mm]: 76

Width [mm]: 35.2

Height [mm]: 88.5

TECHNICAL DATA:

Rated voltage [V]: 230/400 AC

Rated current [A]: 40

Rated frequency [Hz]: 50

Ambient temperature range to which the product can be exposed: -25+40

Connection type: Terminal block

Range of sections of wires used [mm²]: max 16

Control type: mechaniczne

Control type: I - 0 - II

Number of modules: 2

Tightening force [Nm]: 1,2

IP class: 20

Electrical endurance: 2000

Number of poles: 2 (6)

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 60

Number of units in the secondary packaging : 1

Number of units in the packaging: 60

Net unit weight [g]: 150

Grammage [g]: 174.17

Length of a unit pack [cm]: 4

Width of a unit pack [cm]: 9

Height of a unit pack [cm]: 7.8

Weight of a cardboard box [kg]: 10.4502

Width of a cardboard box [cm]: 27

Height of a cardboard box [cm]: 19.5

Length of a cardboard box [cm]: 51.5

Volume of a cardboard box [m³]: 0.027115

23256 KCS-40A/2P

Przełącznik instalacyjny

