

26822 SENTO-O-WT-B/B

PIR motion sensor

5905339268228



Kanlux SENTO-O is an electronic sensor for movement detection. Its exceptionality lies in the fact that as many as three infrared detectors are installed in one sensor. This guarantees an unprecedented sensitivity and allows you to capture even the slightest movement. Kanlux SENTO, due to its unique features, is referred to as presence sensors. The additional advantage is universal installation - flush-mounted and surface-mounted.

GENERAL DATA:

Colour: black

Place of assembly: ceiling mounted, Recessed mount in the ceiling

Place of application: Indoors and outdoors

Micro-interval between relay contacts: yes

Height MAX [mm]: 74

Diameter [mm]: 111

Assembly hole [mm]: Ø66

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Class of protection against electric shock: II

Material: plastic

Ambient temperature range to which the product can be exposed: -20÷40

Sensor type: 3xPIR

Connection type: Terminal block

Range of sections of wires used [mm²]: 0,75÷1,5

Sensor-operation time [second-minute]: 10-30

sensor working angle [°]: H360

Maximum operating time [min]: 30

Minimum operating time[s]: 10

Maximum power [VA]: 2000



Illumination-level setpoint by which the sensor detects movement [lx]: 3-2000

IP class: 44/20

Sensor range[m]: max 17

26822 SENTO-O-WT-B/B

PIR motion sensor

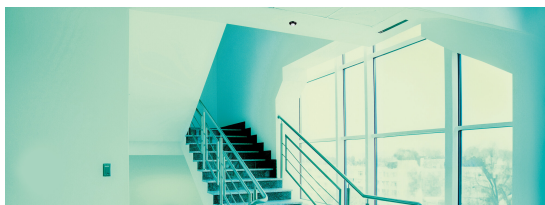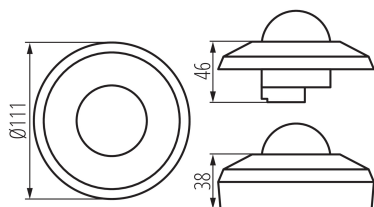

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 50

Number of units in the secondary packaging : 1

Number of units in the packaging : 50

Net unit weight [g] : 180

Grammage [g] : 256.8

Gross unit weight [g] : 240

Length of a unit pack [cm] : 11.5

Width of a unit pack [cm] : 8.5

Height of a unit pack [cm] : 12

Weight of a cardboard box [kg] : 12.84

Width of a cardboard box [cm] : 48

Height of a cardboard box [cm] : 26

Length of a cardboard box [cm] : 60

Volume of a cardboard box [m³] : 0.07488