


27166 HB PROSTRONG 150WD

High-bay LED light fitting

5905339271662

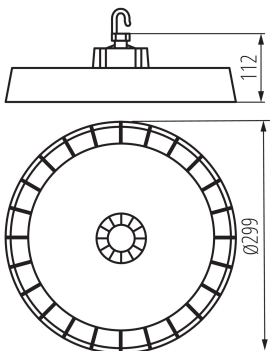

GENERAL DATA:

Colour: grey
Place of assembly: for suspension on the ceiling
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 1m
Compatible with a dimmer: DALI
Height [mm]: 112
Diameter [mm]: 299
Mercury content: no
Mercury content in the lamp [mg]: 0
Integrated LED light source: yes
Number of modules (LED light source): 1

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 150
Class of protection against electric shock: I
Enclosure material: aluminum alloy
Protective glass material: plastic
Diode type: LED SMD
Luminous flux [lm]: 25500
Useful luminous flux of the light source Φ_{use} [lm]: 26850
Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: 6
Colour rendering index: 80
Service life [h]: 50000
Number of on/off cycles: ≥ 25000
Lighting angle [°]: 90
Luminous efficiency of the lamp [lm/W]: 170
Ambient temperature range to which the product can be exposed: -30÷50
Connection type: Free cable ends
Wire type: H05RN-F
Wire length [m]: 0.3
Wire diameter [mm²]: 1
IK class: 08

27166 HB PROSTRONG 150WD

High-bay LED light fitting



IP class: 65

Kształt: round

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the packaging: 1

Net unit weight [g]: 2308

Grammage [g]: 2806

Gross unit weight [g]: 2806

Length of a unit pack [cm]: 34

Width of a unit pack [cm]: 34

Height of a unit pack [cm]: 15

Weight of a cardboard box [kg]: 2.806

Width of a cardboard box [cm]: 34

Height of a cardboard box [cm]: 15

Length of a cardboard box [cm]: 34

Volume of a cardboard box [m³]: 0.01734

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website
- IK10 is achieved when using a protective grid (without IK08 net).

27166 HB PROSTRONG 150WD


High-bay LED light fitting

ACCESSORIES

38135

HBPHS GRID 150W

Protective grid for HB PRO STRONG 150W-NW, HBPHS GRID 150W (38135)



38139

HBPHS LENS 150W 120D

120 degree lens for HB PRO STRONG 150W-NW, HBPHS LENS 150W 120D (38139)



38138

HBPHS LENS 150W 60D

60 degree lens for HB PRO STRONG 150W-NW frame, HBPHS LENS 150W 60D (38138)

