

33164 TP STRONG ECO TW46NW

LED dustproof lighting fitting

5905339331649



GENERAL DATA:

Colour: grey
Place of assembly: ceiling mounted, wall mounted
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 0,5m
Possibility of fixture-loop-through connection: yes
Compatible with a dimmer: no
Length [mm]: 1228
Width [mm]: 65
Height [mm]: 55
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 46
Class of protection against electric shock: II
Lampshade material: PC
Diode type: LED SMD
Luminous flux [lm]: 6000
Useful luminous flux of the light source Φ_{use} [lm]: 2 x 3700
Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: 6
Colour rendering index: 80
Service life [h]: 50000
Number of on/off cycles: ≥ 25000
Lighting angle [°]: X130/Y110
Luminous efficiency of the lamp [lm/W]: 130
Ambient temperature range to which the product can be exposed: -20÷40
Enclosure material: plastic
Connection type: Self-clamping block
Range of sections of wires used [mm²]: 1,0÷2,5
Lamp-heating time [s]: <1
Lamp-ignition time [s]: $\leq 0,5$
IK class: 08
IP class: 65


LOGISTIC DATA:

Unit of measurement: unit



33164 TP STRONG ECO TW46NW

LED dustproof lighting fitting

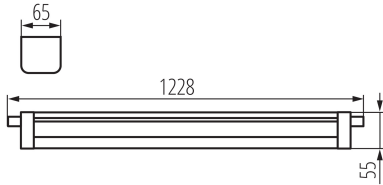

Packaging method: 12

Number of units in the secondary packaging: 1

Number of units in the packaging: 12

Net unit weight [g]: 566

Grammage [g]: 832.5

Gross unit weight [g]: 750

Length of a unit pack [cm]: 130

Width of a unit pack [cm]: 7

Height of a unit pack [cm]: 6

Weight of a cardboard box [kg]: 9.99

Width of a cardboard box [cm]: 30.5

Height of a cardboard box [cm]: 20

Length of a cardboard box [cm]: 131

Volume of a cardboard box [m³]: 0.07991

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website