


33818 ONTEC S M2302MATWCLD

Emergency lighting LED

5902052528745

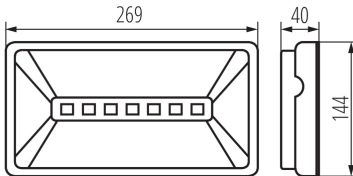

Emergency or anti-panic lighting is used in open space rooms to prevent panic. It allows you to reach a place where you can see the marked escape route as well as for the illumination of the escape route itself, depending on the prism used in the fixture.

GENERAL DATA:

Colour: white

Place of assembly: wall mounted, ceiling mounted

Place of application: Indoors and outdoors

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Rated power [W]: 6,5

Rated power (LED) [W]: 4.7

Class of protection against electric shock: II

Lampshade material: plastic

Diode type: LED SMD

Luminous flux [lm]: 241

Luminous flux [lm] (emergency-lighting module): 241

Colour temperature: cold white

Correlated colour temperature [K]: 5000

Ambient temperature range to which the product can be exposed: -15÷40

Battery (type): LiFePO4/C

Battery (parameters): 6.4V

Operating mode: emergency and network

Application: anti-panic lighting

Fail-safe working time [h]: 3

Automatic test: yes

Enclosure material: plastic

Connection type: Self-clamping block

IP class: 65

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

33818 ONTEC S M2302MATWCLD

Emergency lighting LED

ACCESSORIES

33829

OPRAWA DWUSTRONNA OS0



33830

UCHW PODT OS S2 S3 IT

28985

ZEST POD OR00 B

33876

ZEST MONT S20 FLAGA



33871

ZEST MONT OS05

33877

ZEST MONT OS205

28974

ZEST MON OS010 W