

34154 ALD-SL-WW-MAT-W-NT

Linear LED luminaire 5905339341549













GENERAL DATA:

Colour: white

Place of assembly: ceiling mounted Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: DALI Fixture lighting direction: down

Length [mm]: 580 Width [mm]: 60 Height [mm]: 69

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 10

Class of protection against electric shock: I

Lampshade material: plastic Diode type: LED SMD Luminous flux [lm]: 1150

Colour temperature: Warm white

Correlated colour temperature [K]: 3000 Colour consistency in McAdam ellipses: ≤3

Colour rendering index: 80 Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life :

L90B10

Number of on/off cycles: ≥30000 Lighting angle [°]: X85/Y95

Luminous efficiency of the lamp [lm/W]: 115

Ambient temperature range to which the product can be

exposed: 5÷25 Shade type: matt

Enclosure material: aluminum alloy Connection type: Self-clamping block

Range of sections of wires used [mm²]: 0,5÷2,5

Lamp-heating time [s]: ≤ 1 Lamp-ignition time [s]: ≤ 0.5

IP class: 20

LOGISTIC DATA:

Unit of measurement: unit Packaging method: 1

Date of issue: 01.03.2023, 22:36

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.






34154 ALD-SL-WW-MAT-W-NT

Linear LED luminaire



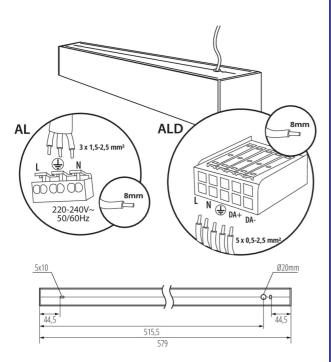

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 1300 Grammage [g]: 1377

Length of a unit pack [cm]: 75 Width of a unit pack [cm]: 11 Height of a unit pack [cm]: 7

Weight of a cardboard box [kg]: 1.377 Width of a cardboard box [cm]: 11 Height of a cardboard box [cm]: 7 Length of a cardboard box [cm]: 75

Volume of a cardboard box [m3]: 0.005775

ADDITIONAL INFORMATION:

• 5 years Warranty under the terms of the warranty statement, available on our website

Date of issue: 01.03.2023, 22:36





ALD-SL-WW-MAT-W-NT 34154

Linear LED luminaire

ACCESSORIES

32543

ALIN CORD DALI 1F-W

Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, white, 150

cm

32544

ALIN CORD DALI 1F-B

Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, black, 150 cm

32545

ALIN CORD DALI 1F-SR

Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, silver, 150

cm

07871

ROPE-NT 150 SINGLE

ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in

a set

29557

ALIN NT GRIP

Wall bracket for the ALIN luminaire, 2 pcs included



27109

KLOSZ MPR AL 11W/17W

MPR shade for fitting ALIN, MPR SHADE AL 11W/17W, (27109)

Date of issue: 01.03.2023, 22:36

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.

