


36607 FL SONE SLR L NW-GR

Solar LED light fitting

5905339366078

IP
65

EA
SY
Installation

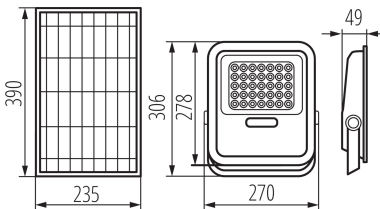

The Kanlux FL SONE SLR fixture is a solar-powered floodlight. We can choose from two floodlight power solutions: 10 or 15W. IP65 makes them dust-proof and protected against water ingress. The adjustable adapter allows for separate installation of the luminaire and solar panel.

GENERAL DATA:

Place of assembly: wall mounted
Replaceable light source: no
Batteries included: yes
Length [mm]: 270
Width [mm]: 49
Height [mm]: 306
Battery-power supply: yes

TECHNICAL DATA:

Rated voltage [V]: 3,2 DC
Power factor: 0
Maximum power [W]: max 15
Class of protection against electric shock: III
Lampshade material: glass
Diode type: LED SMD
Luminous flux [lm]: max 2200
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: ≤6
Service life [h]: 25000
Number of on/off cycles: ≥20000
Lighting angle [°]: 90
Luminous efficiency of the lamp [lm/W]: max 147
Ambient temperature range to which the product can be exposed: -10+35
Battery (type): LiFePO4
Battery (parameters): 15000mAh
Enclosure material: ABS
Sensor type: dusk
IP class: 65

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 5
Number of units in the secondary packaging: 1

36607 FL SONE SLR L NW-GR

Solar LED light fitting



Number of units in the packaging: 5
Net unit weight [g]: 2680
Grammage [g]: 3188
Gross unit weight [g]: 3046
Length of a unit pack [cm]: 43.5
Width of a unit pack [cm]: 29.5
Height of a unit pack [cm]: 43.5
Weight of a cardboard box [kg]: 15.94
Width of a cardboard box [cm]: 29.5
Height of a cardboard box [cm]: 43.5
Length of a cardboard box [cm]: 43.5
Volume of a cardboard box [m³]: 0.055821