

37275 BLINGO NT 34W 6060

Surface-mounted LED panel

5905339372758



Kanlux BLINGO NT is an extension of the BLINGO family, which introduces surface-mounted versions of these popular LED panels. They are an excellent alternative to traditional "panel + frame" configurations. With a luminous efficiency of 120lm/W, BLINGO LED NT offers excellent lighting with low energy consumption. BLINGO NT panels are equipped with a power supply integrated with the fixture, which facilitates installation and ensures a neat appearance. They are also distinguished by exceptionally quick and easy installation, thanks to four mounting holes. The set also includes four mounting pins and caps, which makes installation not only quick but also aesthetic.

By choosing Kanlux BLINGO NT, you gain a modern lighting solution that combines efficiency, ease of installation and reliability. Additionally, Kanlux BLINGO NT is covered by a 5-year warranty, which ensures long-term and trouble-free use.

GENERAL DATA:

Colour: white

Place of assembly: ceiling mounted

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Length [mm]: 605

Width [mm]: 605

Height [mm]: 40

Mercury content in the lamp [mg]: 0

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 34

Class of protection against electric shock: I

Lampshade material: plastic

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 4080

Useful luminous flux of the light source Φ_{use} [lm]: 6 x 790

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Colour temperature: white

Correlated colour temperature [K]: 4000


Colour consistency in McAdam ellipses: 6

Colour rendering index: 80



37275 BLINGO NT 34W 6060

Surface-mounted LED panel

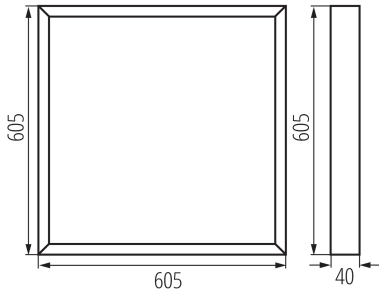

Service life [h]: 50000

Number of on/off cycles: ≥ 50000

Lighting angle [°]: 115

Luminous efficiency of the lamp [lm/W]: 120

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: iron

Panel/frame material: iron

Range of sections of wires used [mm²]: 0,75-2,5

IP class: 20

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 5

Number of units in the secondary packaging: 1

Number of units in the packaging: 5

Net unit weight [g]: 1540

Grammage [g]: 2024

Gross unit weight [g]: 1854

Length of a unit pack [cm]: 61

Width of a unit pack [cm]: 4.5

Height of a unit pack [cm]: 61.5

Weight of a cardboard box [kg]: 10.12

Width of a cardboard box [cm]: 24

Height of a cardboard box [cm]: 63

Length of a cardboard box [cm]: 62.5

Volume of a cardboard box [m³]: 0.0945

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

