

## 37276 BLINGO NT 34W 12030

Surface-mounted LED panel

5905339372765



Kanlux BLINGO NT is an extension of the BLINGO family, which introduces surface-mounted versions of these popular LED panels. They are an excellent alternative to traditional "panel + frame" configurations. With a luminous efficiency of 120lm/W, BLINGO LED NT offers excellent lighting with low energy consumption. BLINGO NT panels are equipped with a power supply integrated with the fixture, which facilitates installation and ensures a neat appearance. They are also distinguished by exceptionally quick and easy installation, thanks to four mounting holes. The set also includes four mounting pins and caps, which makes installation not only quick but also aesthetic. By choosing Kanlux BLINGO NT, you gain a modern lighting solution that combines efficiency, ease of installation and reliability. Additionally, Kanlux BLINGO NT is covered by a 5-year warranty, which ensures long-term and trouble-free use.



### GENERAL DATA:


**Colour:** white  
**Place of assembly:** ceiling mounted  
**Place of application:** Indoors  
**Minimum distance from the illuminated object:** 0,5m  
**Compatible with a dimmer:** no  
**Length [mm]:** 1205  
**Width [mm]:** 305  
**Height [mm]:** 40  
**Mercury content in the lamp [mg]:** 0  
**Integrated LED light source:** yes

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC  
**Rated frequency [Hz]:** 50  
**Maximum power [W]:** 34  
**Class of protection against electric shock:** I  
**Lampshade material:** plastic  
**Diode type:** LED SMD  
**Luminous flux of the light fitting [lm]:** 4080  
**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** 3 x 1580  
**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** in sphere (360°)  
**Colour temperature:** white  
**Correlated colour temperature [K]:** 4000  
**Colour consistency in McAdam ellipses:** 6  
**Colour rendering index:** 80

## 37276 BLINGO NT 34W 12030

Surface-mounted LED panel

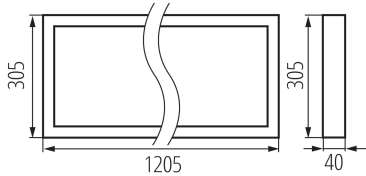

**Service life [h]:** 50000

**Number of on/off cycles:**  $\geq 50000$

**Lighting angle [°]:** 115

**Luminous efficiency of the lamp [lm/W]:** 120

**Ambient temperature range to which the product can be exposed:** 5÷25

**Enclosure material:** iron

**Panel/frame material:** iron

**Range of sections of wires used [mm<sup>2</sup>]:** 0,75-2,5

**IP class:** 20

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 5

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 5

**Net unit weight [g]:** 1584

**Grammage [g]:** 2090

**Gross unit weight [g]:** 1912

**Length of a unit pack [cm]:** 121

**Width of a unit pack [cm]:** 4.5

**Height of a unit pack [cm]:** 31.5

**Weight of a cardboard box [kg]:** 10.45

**Width of a cardboard box [cm]:** 24

**Height of a cardboard box [cm]:** 33

**Length of a cardboard box [cm]:** 122.5

**Volume of a cardboard box [m<sup>3</sup>]:** 0.09702

### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

