


31411 DIGHT LED 36W-NW

LED dustproof lighting fitting

8595665314118

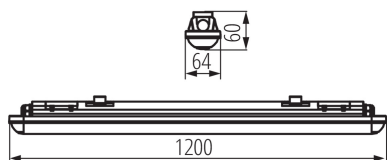

GENERAL DATA:

Colour: grey
Place of assembly: ceiling mounted
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 0,5m
Possibility of fixture-loop-through connection: yes
Compatible with a dimmer: no
Length [mm]: 1200
Width [mm]: 64
Height [mm]: 60
Number of chokes: 2
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 36
Class of protection against electric shock: II
Lampshade material: PC
Diode type: LED SMD
Luminous flux [lm]: 3600
Useful luminous flux of the light source Φ_{use} [lm]: 4500
Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: ≤ 6
Colour rendering index: 80
Service life [h]: 20000
Number of on/off cycles: ≥ 25000
Lighting angle [°]: 110
Luminous efficiency of the lamp [lm/W]: 100
Ambient temperature range to which the product can be exposed: -20÷40
Enclosure material: plastic
Connection type: Bolt terminal block
Range of sections of wires used [mm²]: 1÷2,5
Lamp-heating time [s]: ≤ 1
Lamp-ignition time [s]: $\leq 0,5$
IP class: 65

LOGISTIC DATA:

Unit of measurement: unit

31411 DIGHT LED 36W-NW

LED dustproof lighting fitting

Packaging method: 12
Number of units in the secondary packaging: 1
Number of units in the packaging: 12
Net unit weight [g]: 840
Grammage [g]: 1045.83
Length of a unit pack [cm]: 124
Width of a unit pack [cm]: 6.5
Height of a unit pack [cm]: 6.5
Weight of a cardboard box [kg]: 12.54996
Width of a cardboard box [cm]: 29
Height of a cardboard box [cm]: 22.5
Length of a cardboard box [cm]: 125.5
Volume of a cardboard box [m³]: 0.081889