

iQ-LED

Kanlux

ul. Objazdowa 1-3, 41-922 Radzionków, Poland


33733 IQ-LED C37E14 7,2W-CW

LED light source

5905339337337



IQ-LED C37E14 7,2W



The Kanlux iQ-LED means photobiological safety and eye-friendly colour temperature and reliability, all in the classic C37 design. iQ-LED bulbs provide full comfort of use and safety.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED
Non-directional or directional light source : NDLS
Mains or non-mains light source : MLS
Connected light source (CLS): no
Colour-tuneable light source: no
High luminance light source: no
Anti-glare shield: no
Dimmable: no

PRODUCT PARAMETERS:

Colour: white
Compatible with a dimmer: no
Width [mm]: 37
Height [mm]: 110
Depth [mm]: 37
Diameter [mm]: 37
Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Lamp rated current [mA]: 55
Rated power [W]: 7.2
Total rated luminous flux [lm]: 840
Rated beam angle [°]: 280
Material: plastic
Lampshade material: plastic
Light source: C37
Diode type: LED SMD
Colour temperature: cold white
Cap: E14
Rated lamp-service life [h]: 25000
Number of on/off cycles: ≥40000
Light source shape: świeczka
Additional information: Light source (LS)

Date of issue: 02.02.2024, 16:07


We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

EN

33733 IQ-LED C37E14 7,2W-CW

LED light source

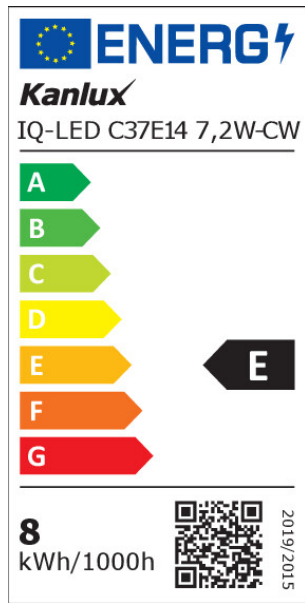

Mercury content: no

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source

(kWh/1000h): 8

Energy efficiency class: E

Useful luminous flux of the light source Φ_{use} [lm]: 840

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Correlated colour temperature [K]: 6500

Colour consistency in McAdam ellipses: ≤ 6

On-mode power of the light source P_{on} [W]: 7.2

Height of the light source [mm]: 110

Width of the light source [mm]: 37

Depth of the light source [mm]: 37

Colour rendering index: 80

Chromaticity coordinates (x): 0.313

Chromaticity coordinates (y): 0.337

Claim of equivalent power [W]: 62

R9 colour rendering index value: 12

Survival factor: ≥ 0.9

The lumen maintenance factor: 0.96

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

Flicker metric (Pst LM): 1,0

Stroboscopic effect metric (SVM): 0.4

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 20

Number of units in the secondary packaging: 20

Number of units in the packaging: 100

Net unit weight [g]: 26

Grammage [g]: 54.9


Gross unit weight [g]: 42

Length of a unit pack [cm]: 5

Width of a unit pack [cm]: 5

33733 IQ-LED C37E14 7,2W-CW

LED light source

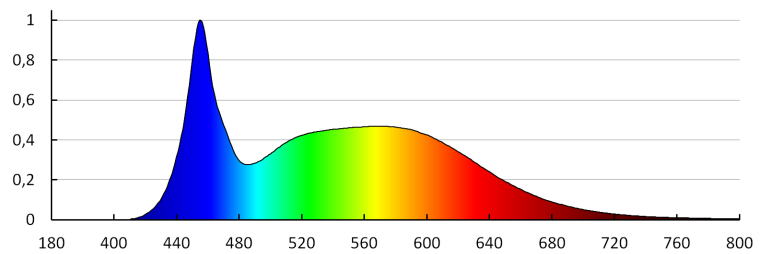Height of a unit pack [cm]: 11.5**Weight of a cardboard box [kg]: 5.49****Width of a cardboard box [cm]: 27****Height of a cardboard box [cm]: 27.5****Length of a cardboard box [cm] : 55****Volume of a cardboard box [m³]: 0.040838**

KANLUX S.A. (kat 33733) IQ-LED C37E14 7,2W-CW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33733) IQ-LED C37E14 7,2W-CW
Lampa: 1 x IQ-LED C37E14 7,2W-CW