

## MAH LED HI

Corp de iluminat LED rezistent la praf



up to  
**150**  $\frac{\text{lm}}{\text{W}}$



<b>[V]</b> 220-240 AC	<b>[Hz]</b> 50	$\geq 15000$	<b>[h]</b> 50000	ellipse $\leq 6 \times \text{MacAdam}$	<b>Ra</b> 80	<b>SMD</b>
		<b>IP</b> 65		$^{\circ}\text{C}$ -20÷40		<b>IK</b> 08
	$\text{[mm}^2\text{]}$ 1,5÷2,5	$\text{---m}$ 0,5m	<b>CE</b>	<b>EAC</b>	<b>PZH</b>	<b>UK</b> <b>CA</b>



### MAH LED HI 19W-NW RYF




	<b>[W]</b>	<b>[lm]</b>	<b>Tc [K]</b>	<b>[°]</b>	<b>gri</b>	
MAH LED HI 19W-NW RYF	<b>22606</b>	19	2400	4000	110	gri
MAH LED HI 38W-NW RYF	<b>22607</b>	38	5000	4000	110	gri
MAH LED HI 48W-NW RYF	<b>22608</b>	48	6400	4000	110	gri
MAH LED HI 26W-NW RYF	<b>22609</b>	26	3900	4000	110	gri

- 5 ani Garanție în conformitate cu prevederile declarației de garanție, disponibile pe site
- Materialul carcasei: PC
- Materialul abajurului: PC

## MAH LED HI

Corp de iluminat LED rezistent la praf

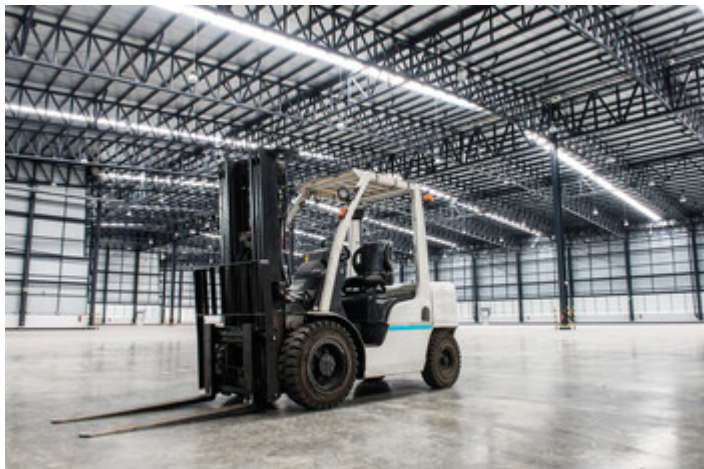

MAH LED HI 19W-NW RYF




MAH LED HI 38W-NW RYF




MAH LED HI 48W-NW RYF




MAH LED HI 26W-NW RYF

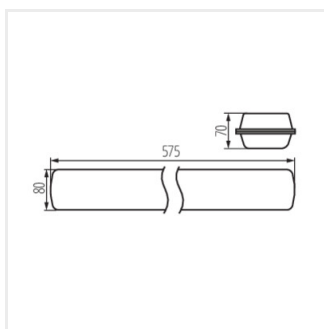


MAH LED HI 19W RYF

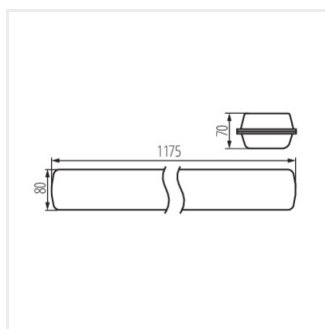

MAH LED HI 38W-NW RYF

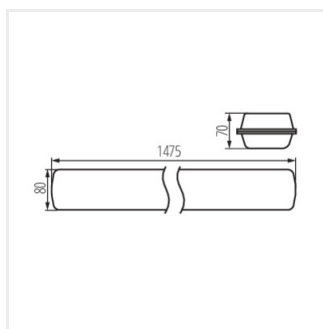

MAH LED HI 48W RYF

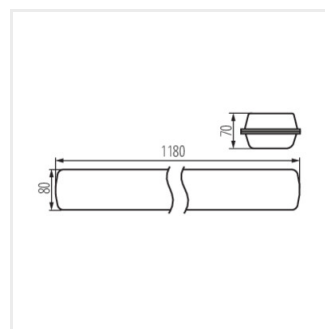

MAH LED HI 26W RYF